


electric plug-in motor,
changeover time about 150 s
In the end position, the drive
stops automatically due to its
own motor stroke.
Limit switch for feedback
on request

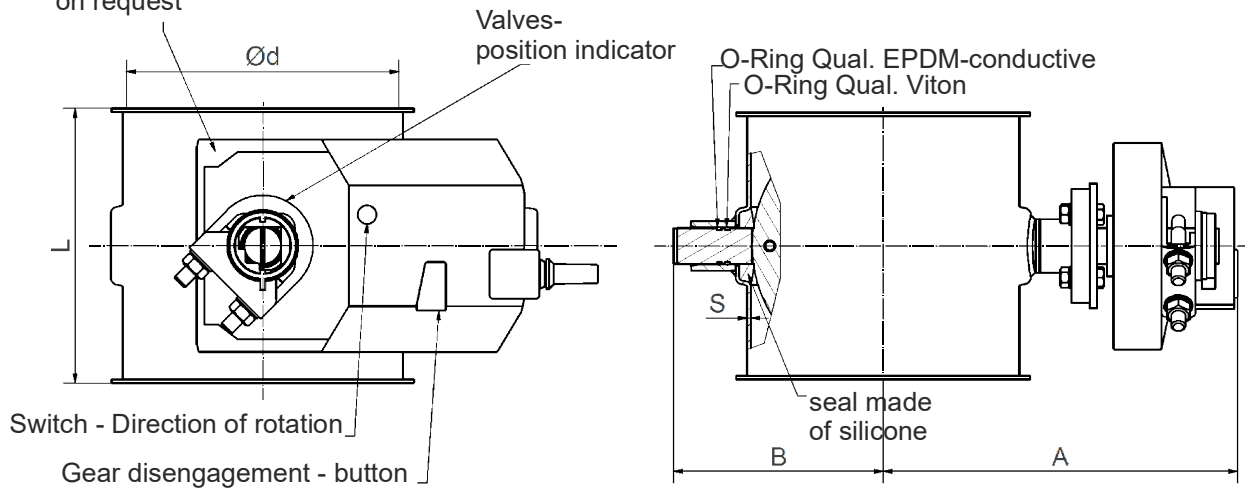

Pipe diameter tolerance and roundness tolerance to DIN EN 10296-1
Lengths and angles – DIN ISO 2768-1 – Tolerance class V
* 5=powder-coated, 6=stainless steel

Pipe	Ø 80	Ø 100	Ø 120	Ø 140	Ø 150	Ø 160	Ø 175	Ø 200
Article-no.	*7720805	*7721005	*7721205	*7721405	*7721505	*7721605	*7721705	*7722005
Ø d	76	99	119	135	149	159	174	199
A	166	179	189	197	204	209	216	229
B	86	98	108	116	123	123	135	148
L	100	100	120	140	150	160	175	200
S	2	2	2	2	2	2	2	2
Weight in kg	3,90	4,20	4,60	5,00	5,20	5,50	5,8	6,6

In case of placing your order please state the desired signal-current. Please take notice of the following no.-code. The 2-digit number has to be added to 8-digit article-no. code.	Make	Signal-current
73 AIR TORQUE Adjustable drive	230V, AC
74 AIR TORQUE Adjustable drive	24V, AC/DC

Denomination: <h2 style="text-align: center;">Throttle valves with seal electrically-operated valve actuator</h2>	Date:	07/24
	Datasheet-no.	8/9
	Rev.	1